



RG-122-1, RG-122-2, RG-122-3, RG-122-4



24 Volt Emergency Aircraft Batteries for
Emergency, Avionics, FADEC and more

TSO-C173 APPROVED

Avionics Battery for lighting, standby, emergency power. Protects and extends the life of other avionics. Concorde's Emergency Batteries float directly on the DC buss with no need for a dedicated charger. This results in a high inrush current which extends battery life with fast recovery time from discharge. With the battery floating directly on the buss, transient spikes in the DC power are absorbed. These batteries are self regulating on charge and will take only the current required to maintain it at a full charge.

Recombinant Gas - The RG[®] Series are low resistance, valve regulated sealed lead acid (VRLA) batteries. The original AGM (Absorbent Glass Mat) battery designed for the U.S. Military.

- Maintenance free, no addition of electrolyte or water required
- Shipped fully charged and ready to install
- RG[®] Series batteries ship Hazmat Exempt

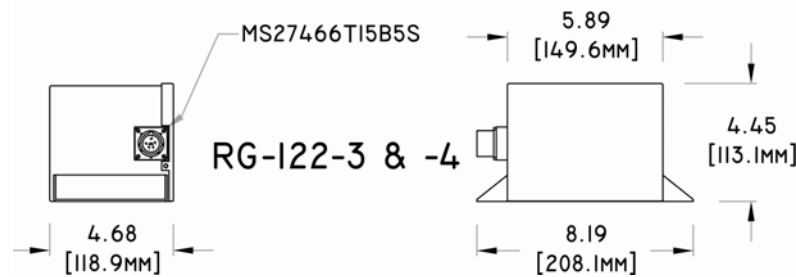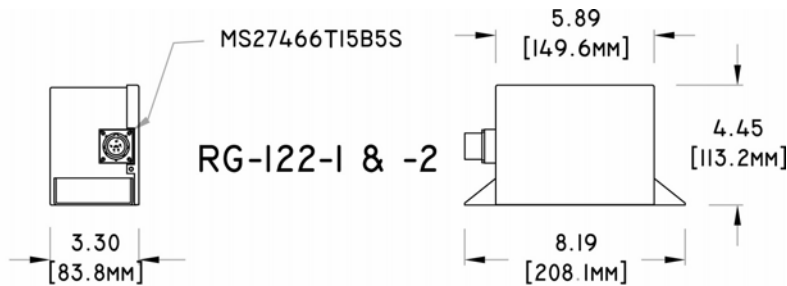

Part Number – 24 Volt	RG-122-1	RG-122-2
Maximum Weight	6.4 LBS [2.9 KG]	
Rated Capacity, C ₁	2.0 AH	2.0 AH
Capacity, 23° C (74° F)	2.0 AH	2.0 AH
Capacity, -18° C (0° F)	1.3 AH	1.5 AH
Capacity, -30° C (-22° F)	0.5 AH	1.0 AH
Internal DC Heater	NONE	2A max @ 28.25 VDC

Part Number – 24 Volt	RG-122-3	RG-122-4
Maximum Weight	10.0 LB [2.9 KG]	
Rated Capacity, C ₁	3.3 AH	3.3 AH
Capacity, 23° C (74° F)	3.3 AH	3.3 AH
Capacity, -18° C (0° F)	2.1 AH	2.6 AH
Capacity, -30° C (-22° F)	1.5 AH	2.1 AH
Internal DC Heater	NONE	2A max @ 28.25 VDC

Rated in accordance with International Standard 60952-1.
Specs subject to change without notice.



2009 San Bernardino Road
West Covina, CA, 91790
Phone 626-813-1234 | Fax 626-813-1235
www.concordebattery.com
customer-service@concordebattery.com
ISO 9001:2000 + AS9100B