


NOTES: UNLESS OTHERWISE SPECIFIED

1. SEE DRAWING NO. CB-00294 AND PROCEDURE P-1000 FOR ASSEMBLY AND TEST INSTRUCTION. PROCEDURES AND ASSEMBLY DRAWINGS ARE FOR INTERNAL USE ONLY.
2. ALL TESTING ARE IAW BATTERY COUNCIL INTERNATIONAL STANDARDS.
3. ALL DIMENSIONS ARE IN INCHES [MM].

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
B	REDESIGNED CASE AND COVER	1/22/03	JBT

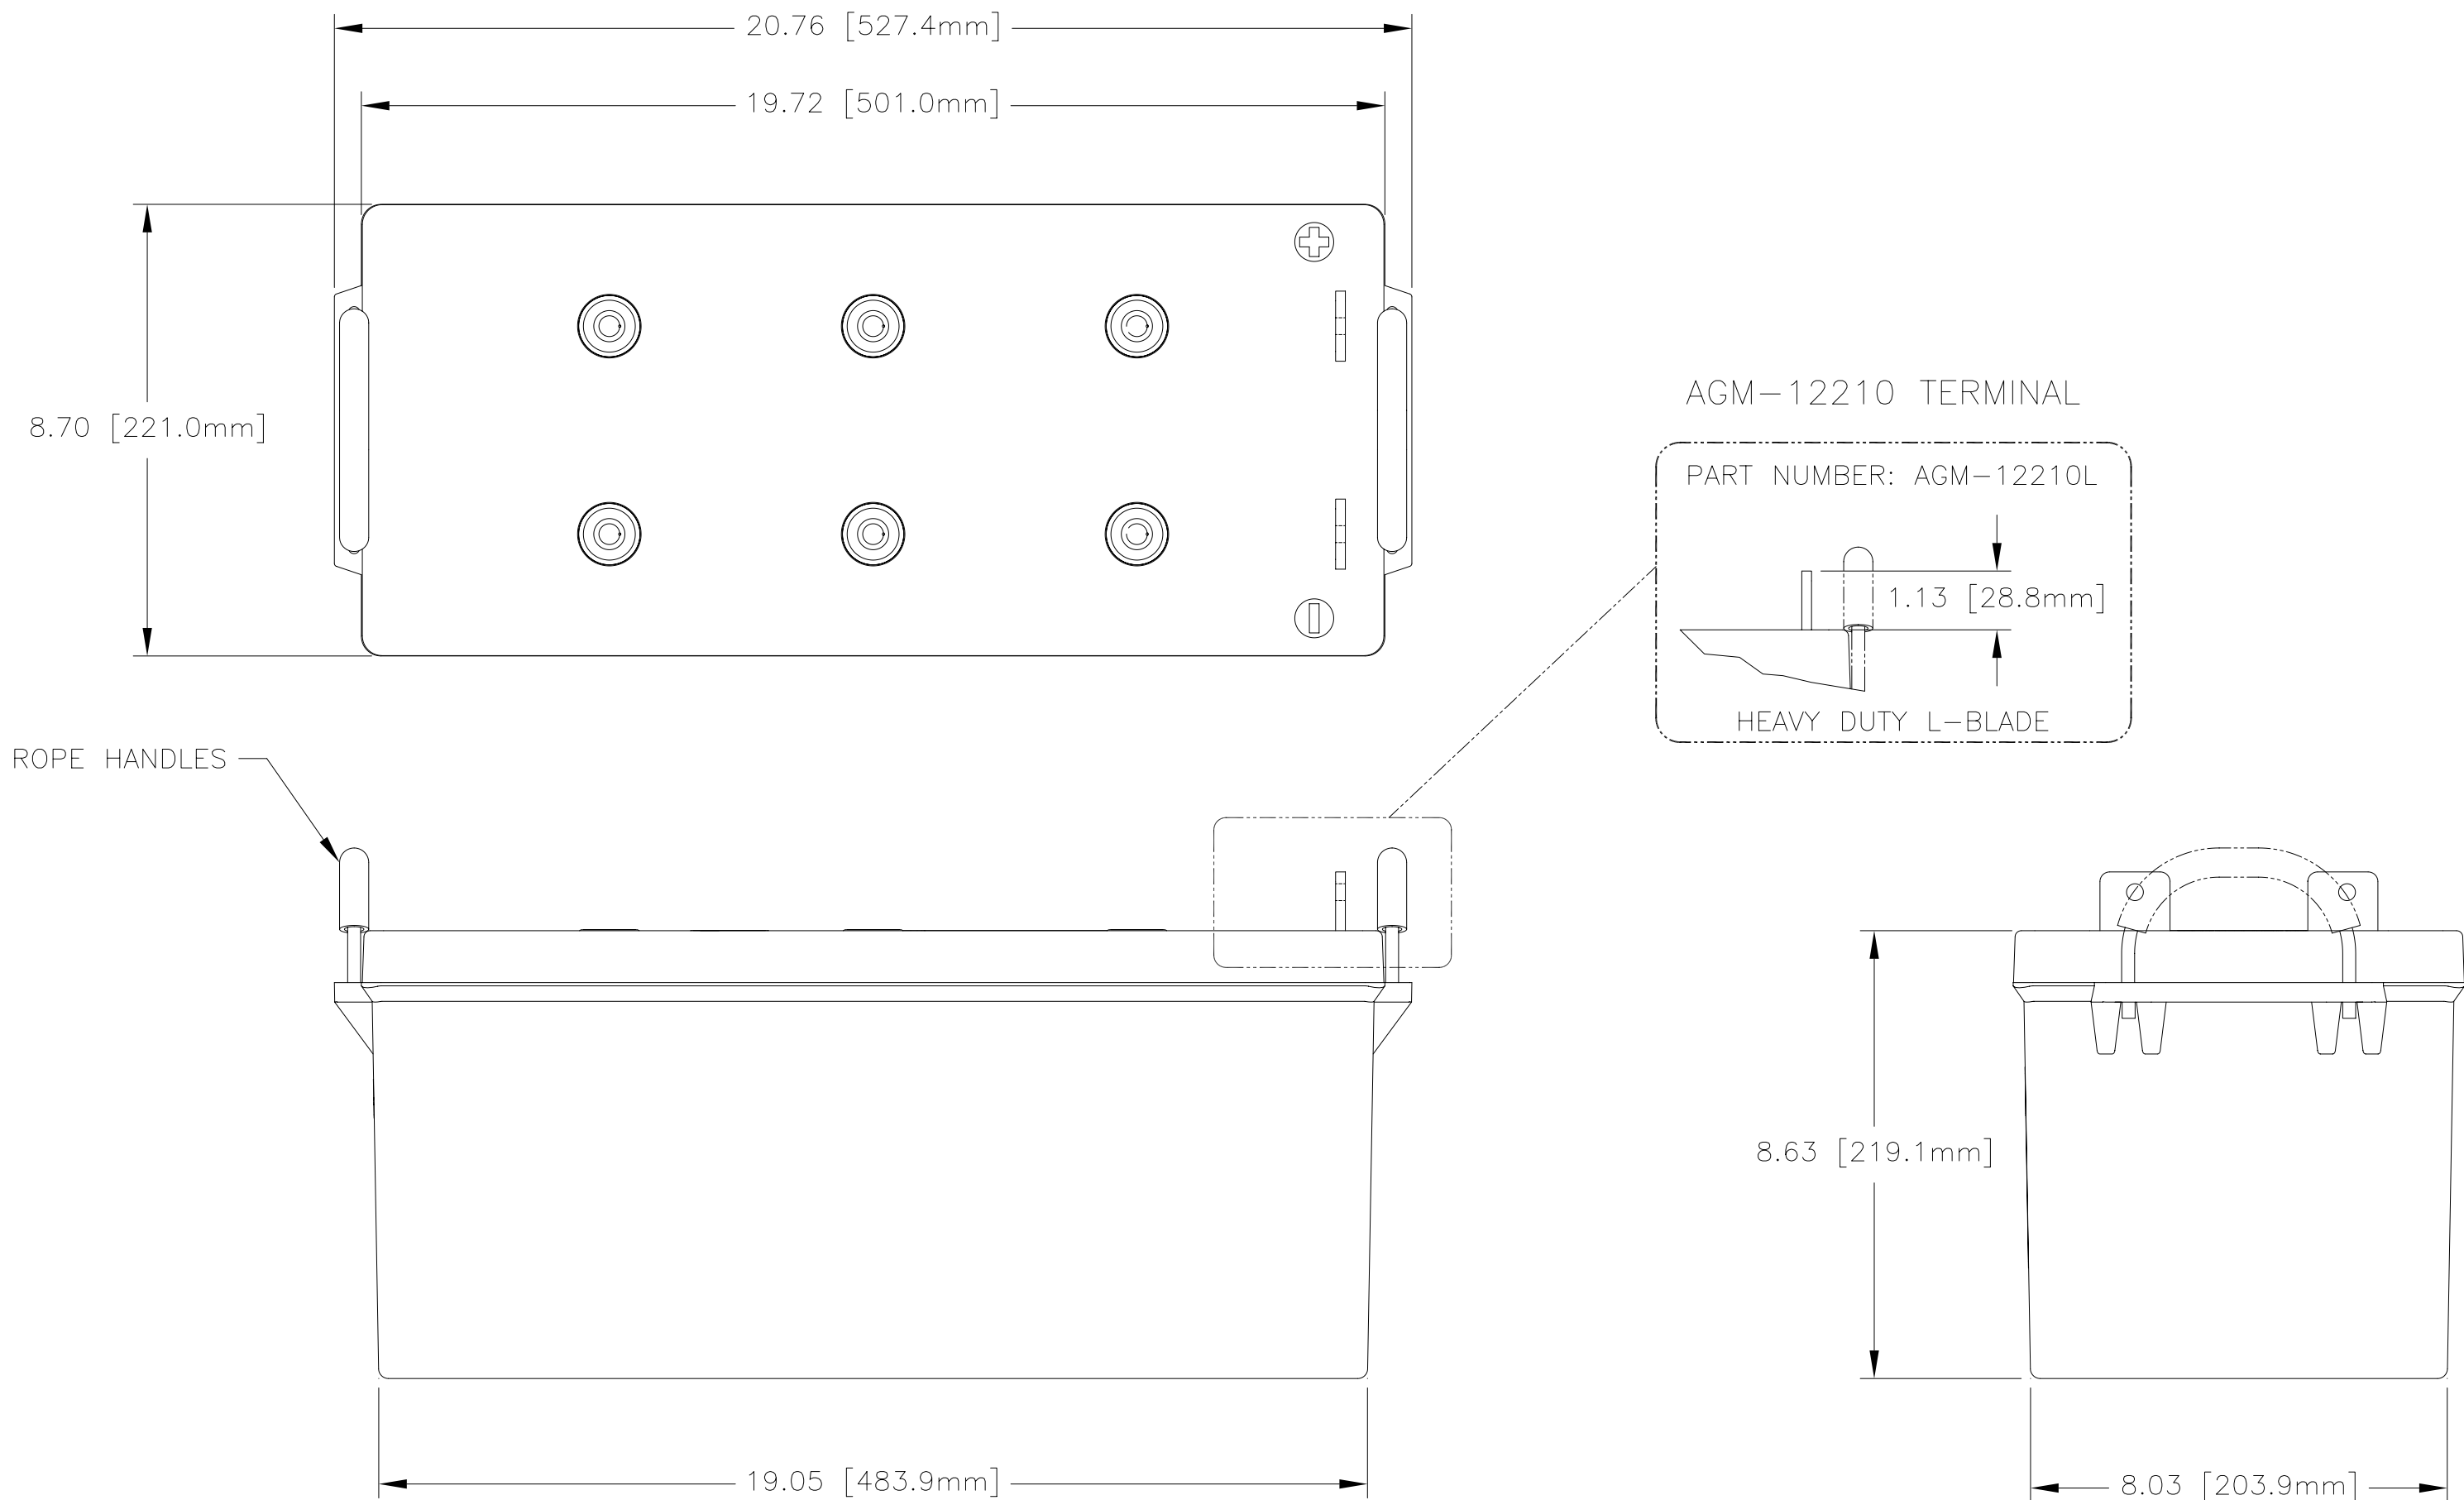

CAPACITY RATINGS	
PART NUMBER	AGM-12210
NOMINAL WEIGHT	135 LBS[61.2 KG]
AMPERE HOUR CAPACITY @ 20 HOUR 1.75 VOLTS/CELL @ 77°F (25° C)	210 AH
MINUTES OF DISCHARGE @ 25 AMPS 1.75 VOLTS/CELL @ 77°F (25° C)	390 MIN

ENVELOPE DRAWING

QTY REQD	CAGE CODE	PART OR IDENTIFYING NO.	NOMENCLATURE OR DESCRIPTION	MATERIAL SPECIFICATION	ITEM NO.
PARTS LIST					
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES. TOLERANCES ARE: FRACTIONS DECIMALS ANGLES ± 1/32 .XX ± .06 ± 1° .XXX ± .060			CONCORDE BATTERY CORPORATION 2099 SAN BERNARDINO RD, W. COVINA, CA 91790		
TREATMENT		APPROVALS		TITLE	
NONE		DRAWN ELH 3/21/00		BATTERY, 12 VOLT, AGM-12210	
FINISH		CHECKED S. VALDEZ 3/21/00		SIZE	REV
NONE		APPROVED DG 3/22/00		C 63017	B
SIMILAR TO		ISSUED AT 1/24/03		DWG NO. AGM-12210	SCALE NONE
N/A	ACT WT N/A	CALC WT N/A	AT	SHEET 1 OF 1	

ENGINEERING COPY 24JAN03