





NOTES: UNLESS OTHERWISE SPECIFIED

1. SEE DRAWING NO. CB-00290 AND PROCEDURE P-1000 FOR ASSEMBLY AND TEST INSTRUCTION. PROCEDURES AND ASSEMBLY DRAWINGS ARE FOR INTERNAL USE ONLY.
2. ALL TESTING IS PERFORMED IAW BATTERY COUNCIL INTERNATIONAL STANDARDS.
3. DIMENSIONS ARE INCH [MILLIMETERS].
4. ABBREVIATION USED IN TITLE IS: SEALED LEAD ACID (SLA).

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED

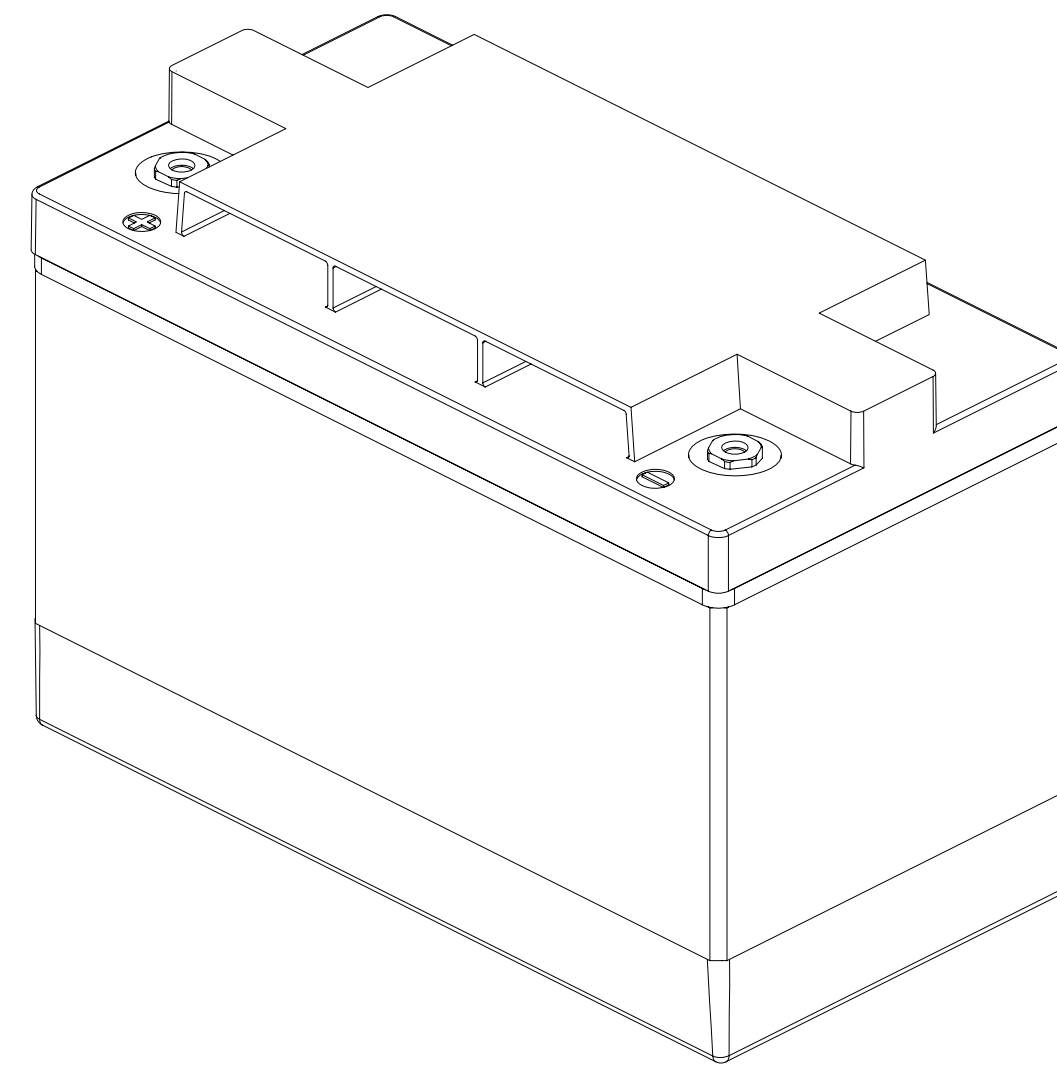

REFERENCE VIEW

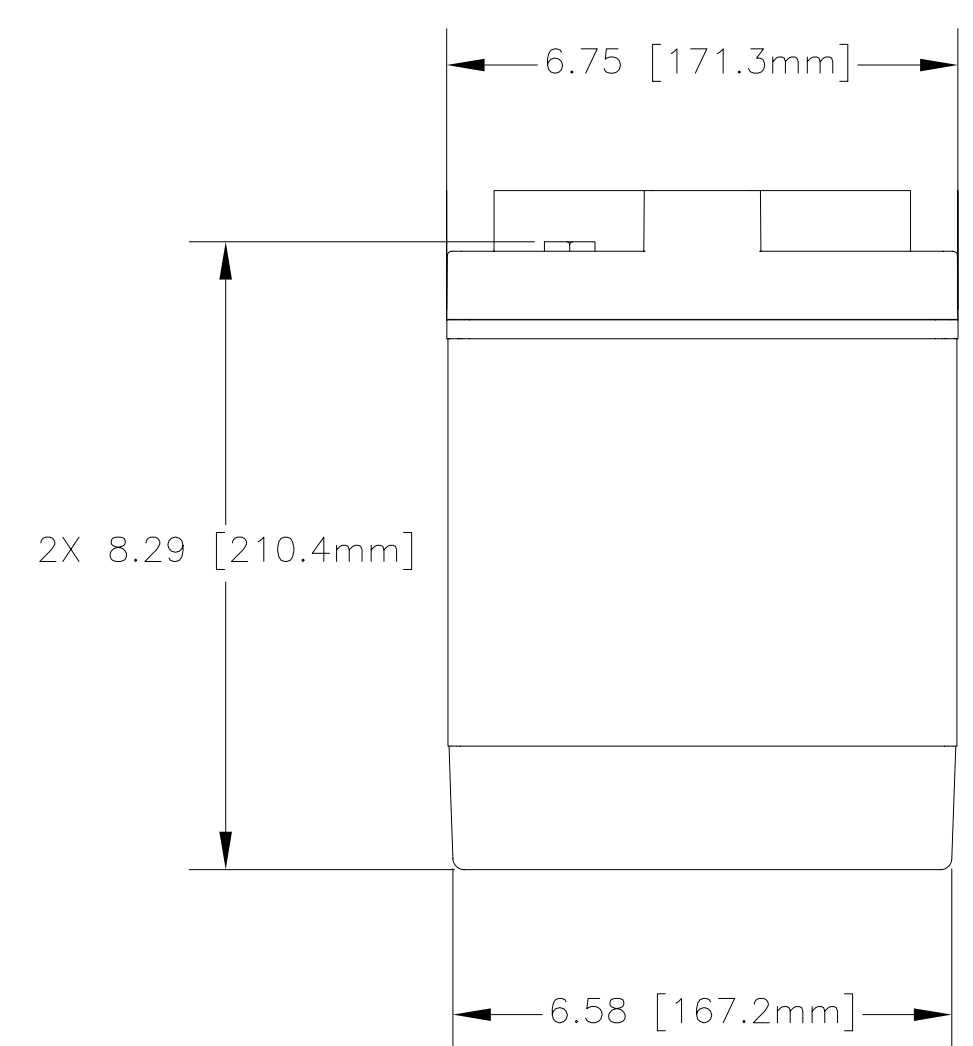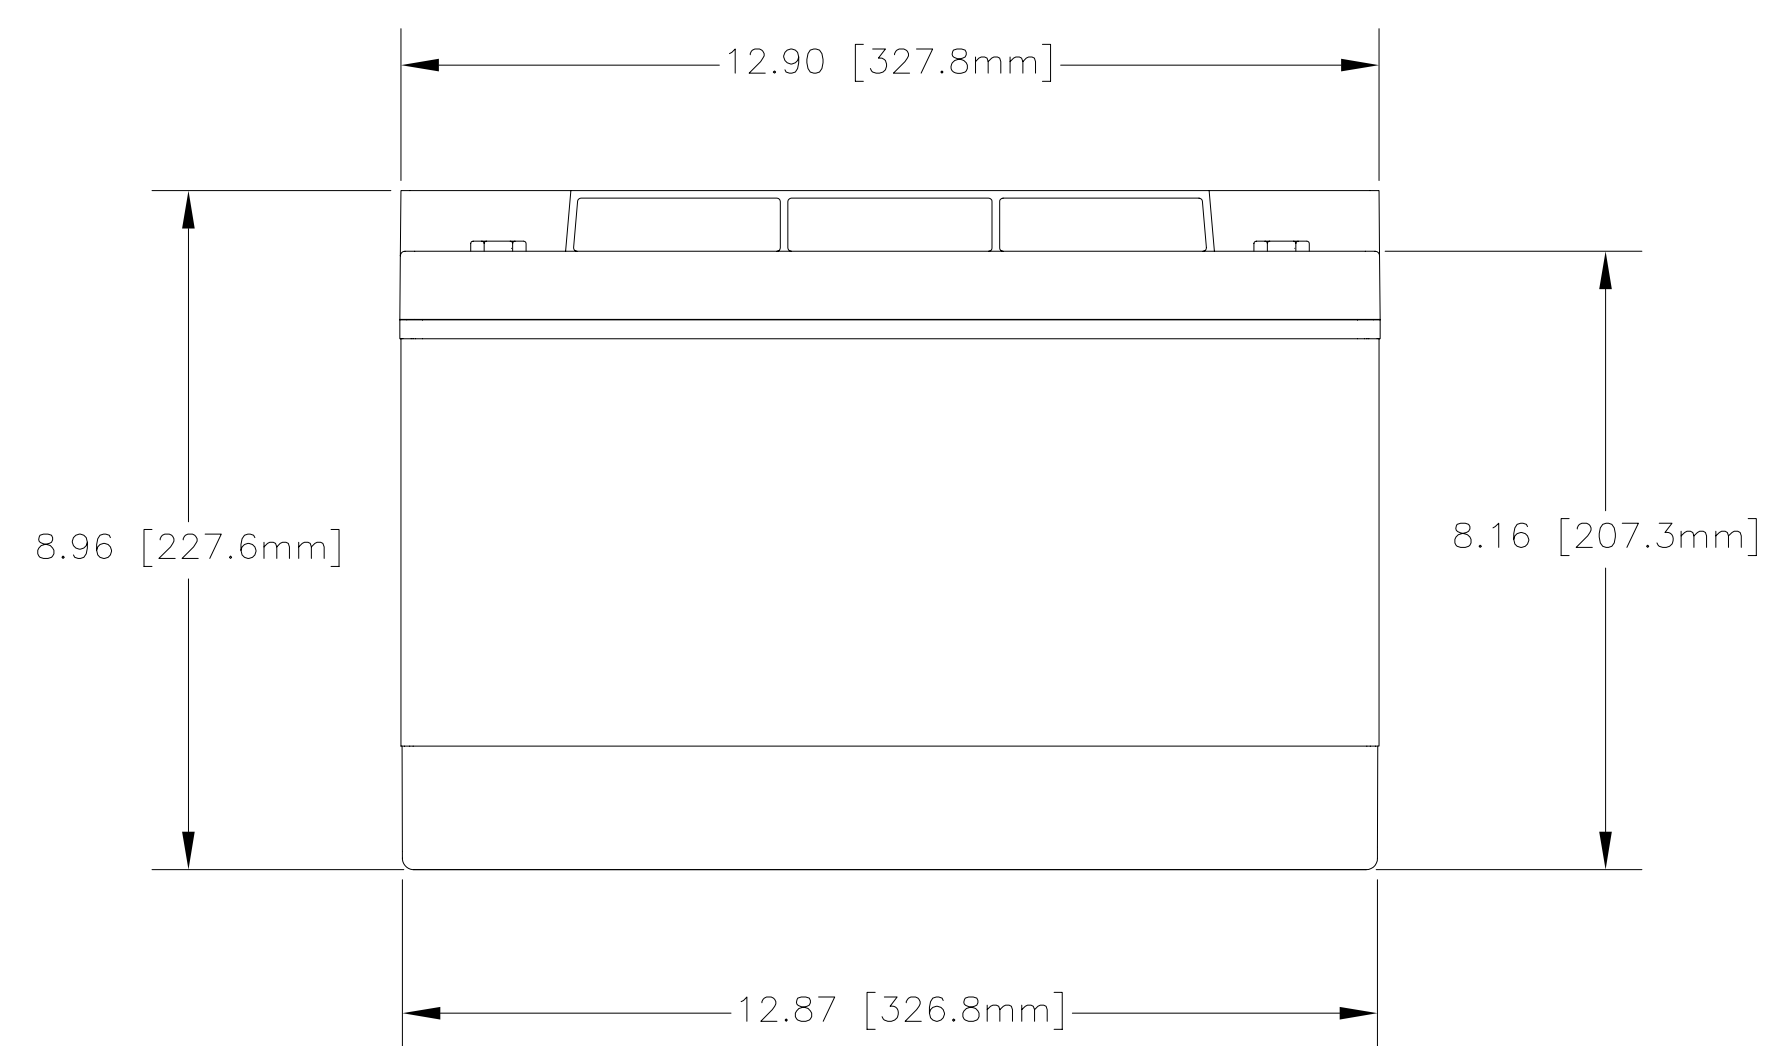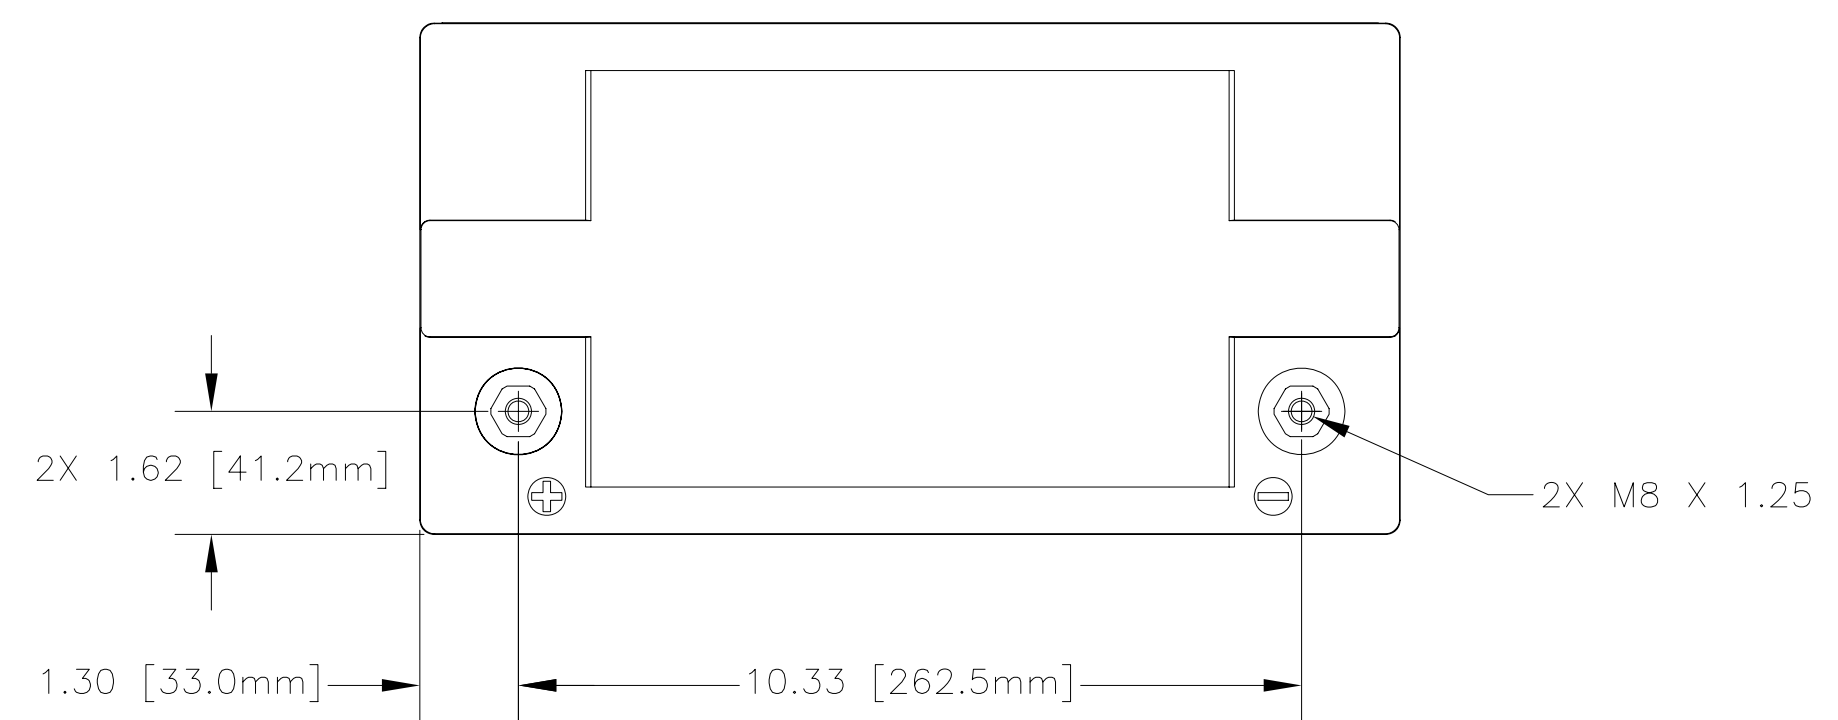

ENVELOPE DRAWING

CAPACITY RATINGS	
PART NUMBER	PVX-1290T
NOMINAL WEIGHT	75 LBS [34.0 KG]
AMPERE HOUR CAPACITY @ 24 HOUR 1.75 VOLTS/CELL @ 77°F (25°C)	129 AH

QTY REQD	CAGE CODE	PART OR IDENTIFYING NO.	NOMENCLATURE OR DESCRIPTION	MATERIAL SPECIFICATION	ITEM NO.	
PARTS LIST						
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE:		CONTRACT NO. NA		CONCORDE BATTERY CORPORATION 2009 SAN BERNARDINO RD, W. COVINA, CA 91790		
FRACTIONS ± 1/32	DECIMALS .XX ± .06	ANGLES ± 1°	APPROVALS	DATE	TITLE	
	.XXX ± .030		DRAWN D. AYALA	5/13/11	BATTERY, SLA, 12 VOLT, PVX-1290T	
TREATMENT	NONE	CHECKED	AMIII	5/16/11	SIZE	
FINISH	NONE	APPROVED	DV	5/17/11	CAGE CODE	
SIMILAR TO NA	ACT WT NA	CALC WT NA	ISSUED	JJ	5/17/11	DWG NO. PVX-1290T
						REV
						SCALE NONE
						SHEET 1 OF 1