



NOTES: UNLESS OTHERWISE SPECIFIED

1. SEE DRAWING NO. CB-00294 AND PROCEDURE P-1000 FOR ASSEMBLY AND TEST INSTRUCTION. PROCEDURES AND ASSEMBLY DRAWINGS ARE FOR INTERNAL USE ONLY.
2. ALL TESTING IS PERFORMED IAW BATTERY COUNCIL INTERNATIONAL STANDARDS.
3. ALL DIMENSIONS ARE INCH [MM].
4. ABBREVIATION USED IN TITLE IS: SEALED LEAD ACID (SLA).


REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
D	SEE DCN PVX2120D	8/10/11	JBT

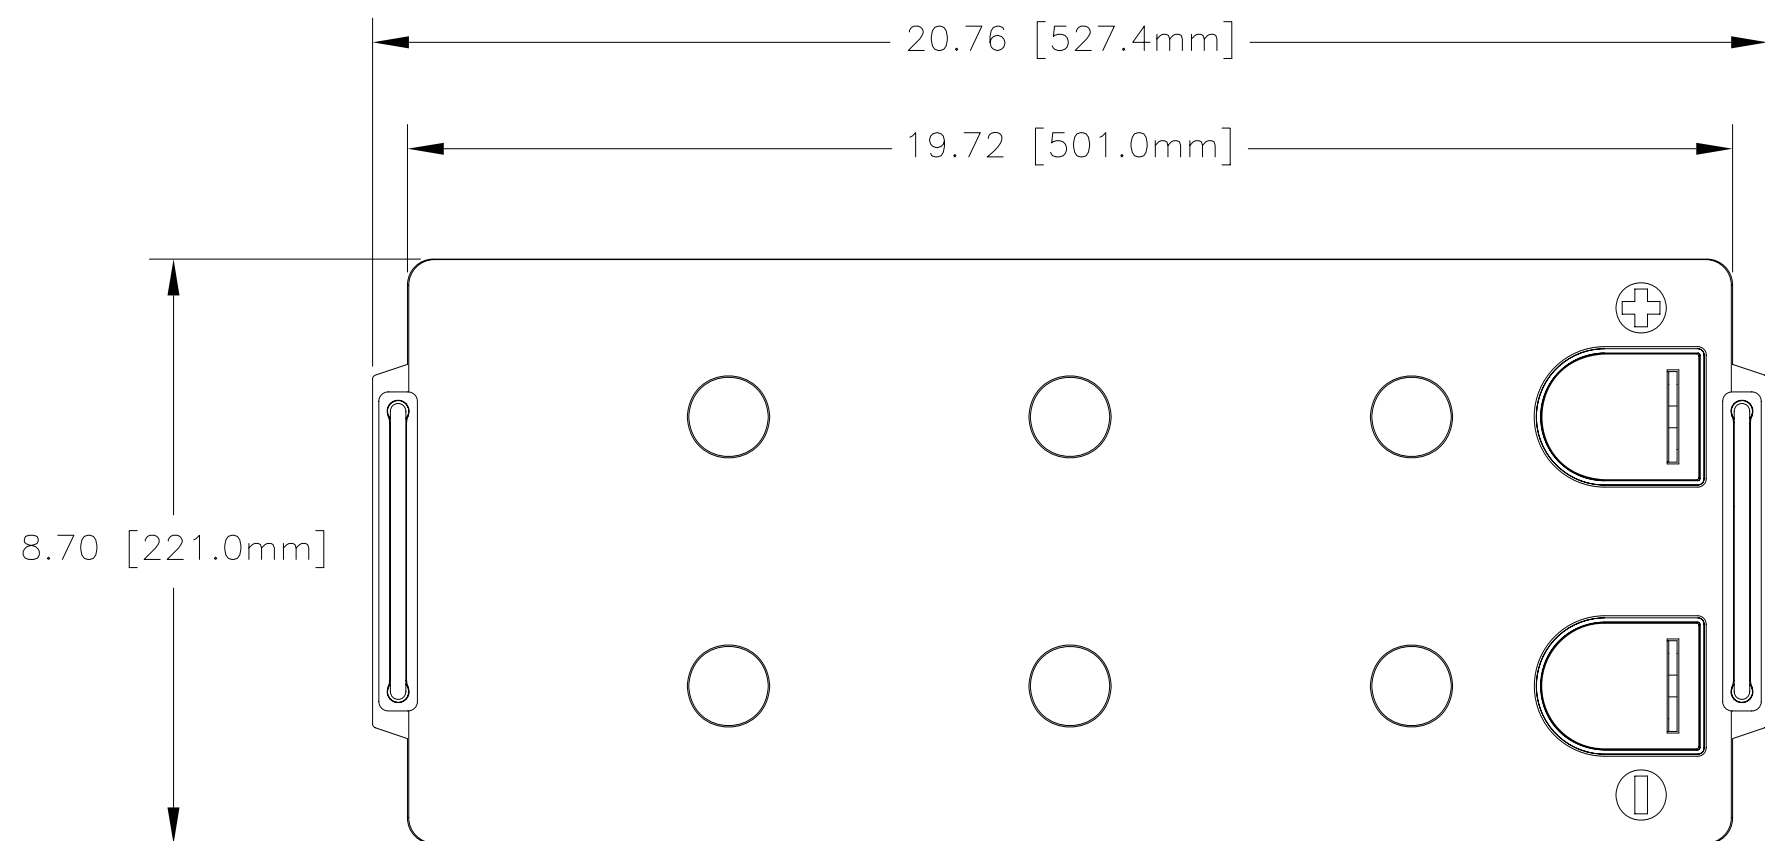

PVX-2120 TERMINAL OPTION

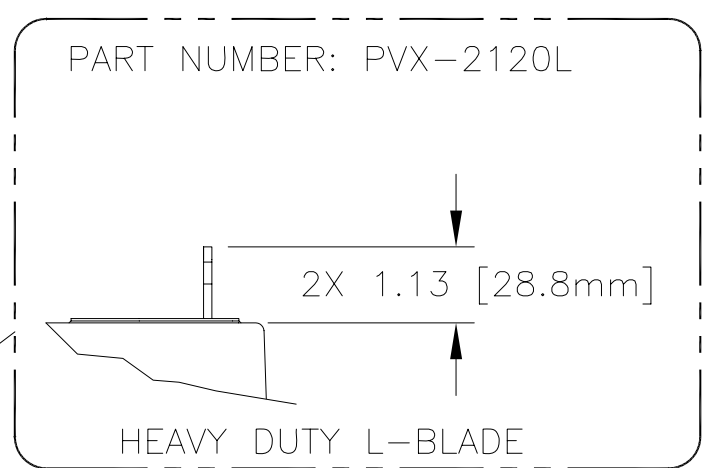

NOTE: SEE OPTION LISTED

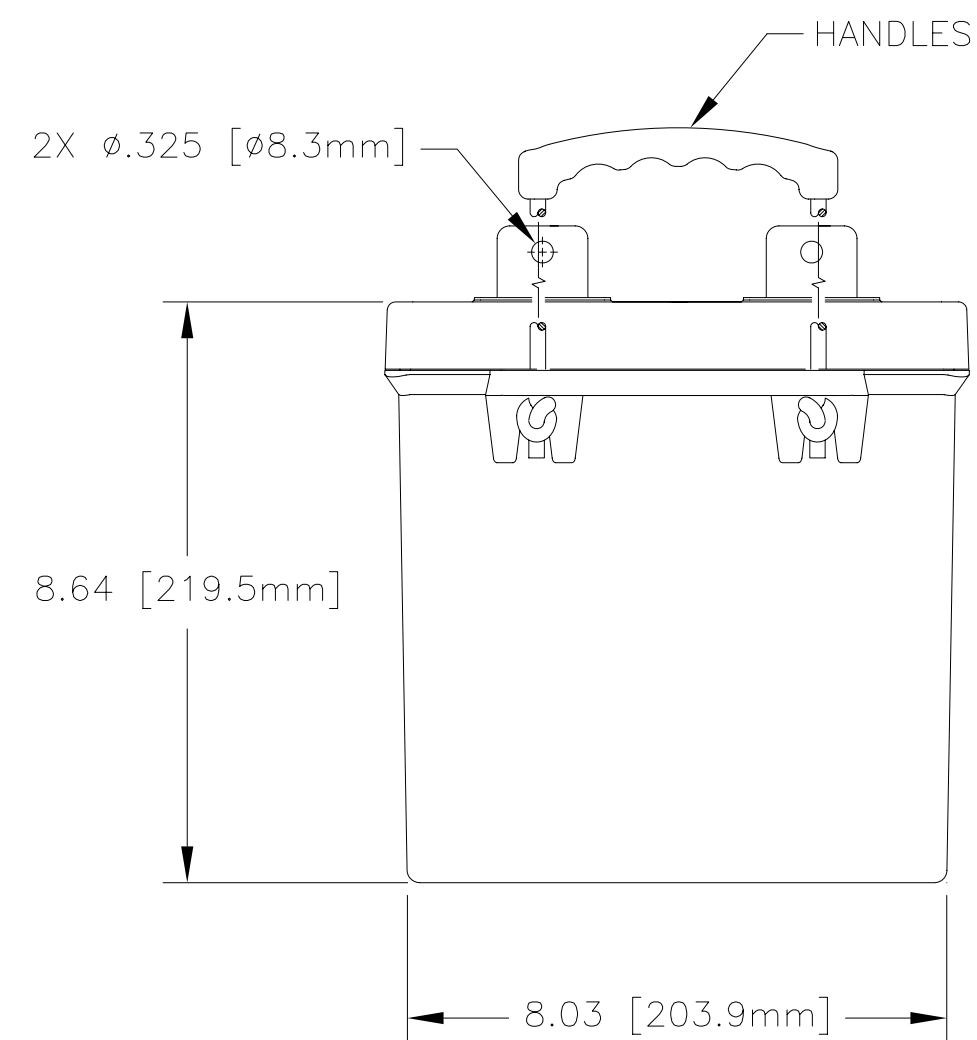

ENVELOPE DRAWING

CAPACITY RATINGS	
PART NUMBER	PVX-2120
NOMINAL WEIGHT	127 LBS[57.6 KG]
AMPERE HOUR CAPACITY @ 24 HOUR 1.75 VOLTS/CELL @ 77°F (25° C)	212 AH

QTY REQD	CAGE CODE	PART OR IDENTIFYING NO.	NOMENCLATURE OR DESCRIPTION	MATERIAL SPECIFICATION	ITEM NO.
PARTS LIST					
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE: FRACTIONS DECIMALS ANGLES ± 1/32 .XX ± .06 ± 1'			CONCORDE BATTERY CORPORATION 2009 SAN BERNARDINO RD, W. COVINA, CA 91790		
APPROVALS		DATE	TITLE		
DRAWN	ELH	8/13/01	BATTERY, SLA, 12 VOLT, PVX-2120		
CHECKED		DATE	SIZE	CAGE CODE	DWG NO.
HRF		8/21/01	C	63017	PVX-2120
APPROVED		DATE	SCALE	REV	D
JBT		8/23/01	NONE		
ISSUED		DATE	SHEET		OF
JJ		8/12/11	1		1