
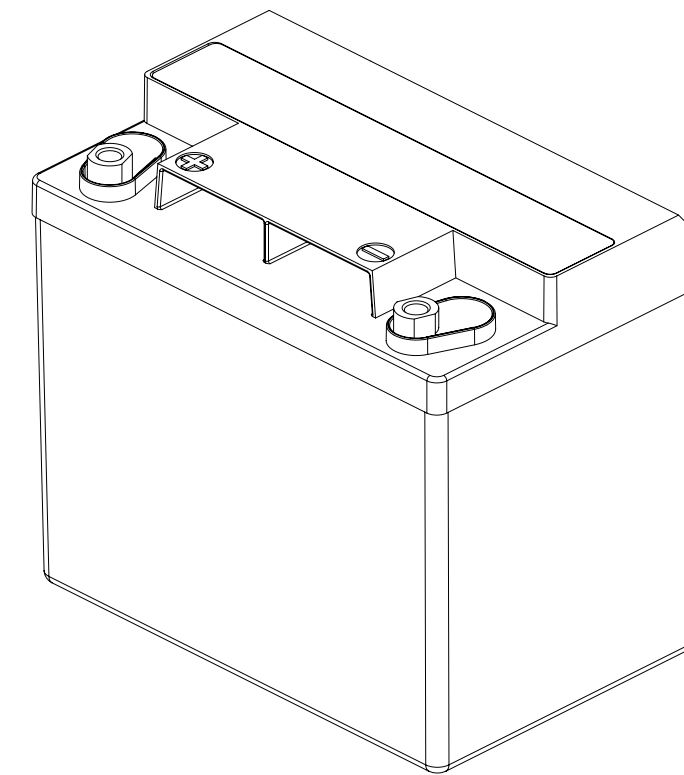




NOTES: UNLESS OTHERWISE SPECIFIED

1. SEE DRAWING NO. CB-00291 AND PROCEDURE P-1000 FOR ASSEMBLY AND TEST INSTRUCTION. PROCEDURES AND ASSEMBLY DRAWINGS ARE FOR INTERNAL USE ONLY.
2. ALL TESTING ARE IAW BATTERY COUNCIL INTERNATIONAL STANDARDS.
3. ALL DIMENSIONS ARE IN INCHES [MM].
4. ABBREVIATION USED IN TITLE IS: SEALED LEAD ACID (SLA).

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED

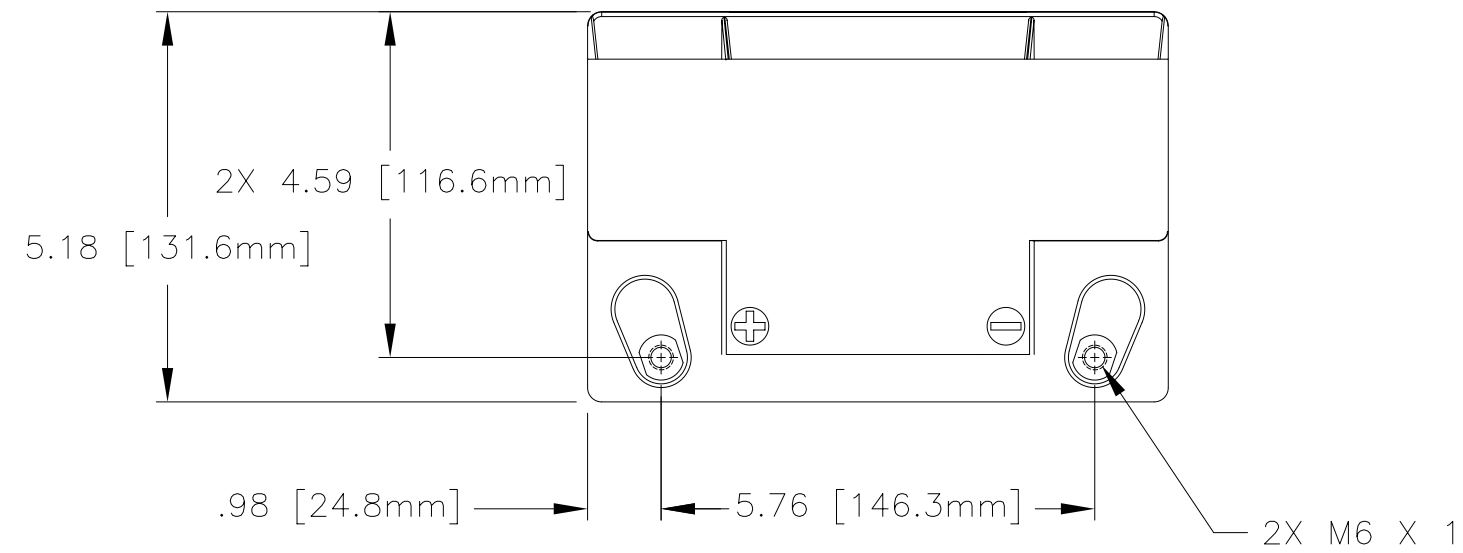

REFERENCE VIEW

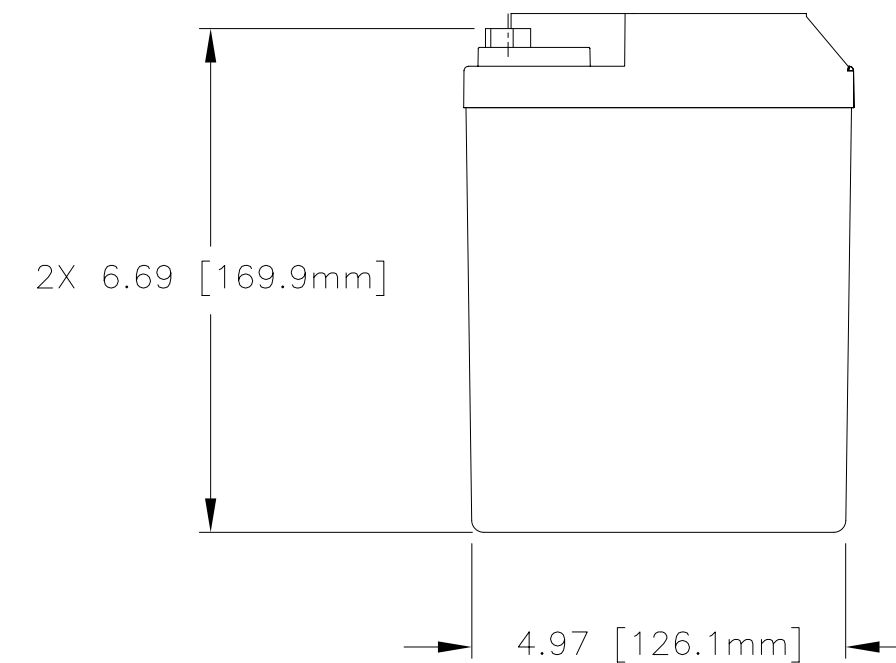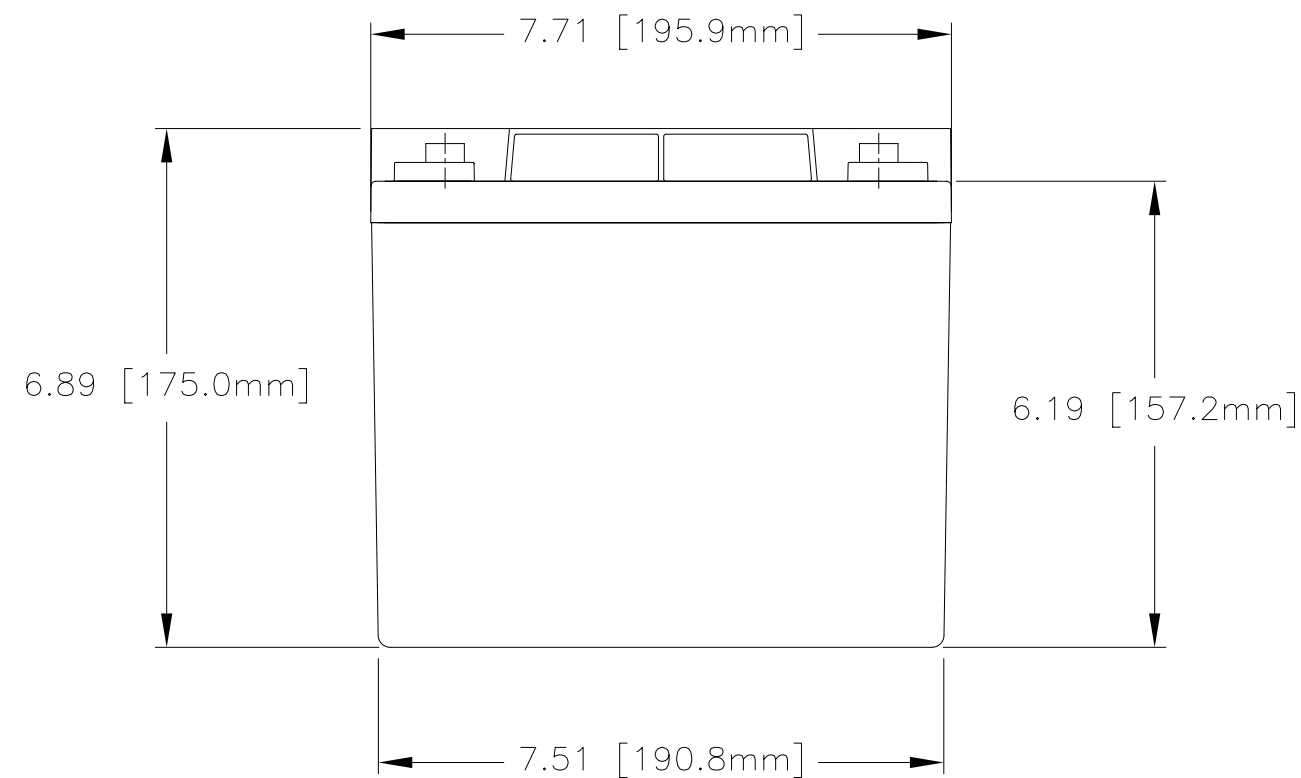

CAPACITY RATINGS	
PART NUMBER	PVX-340T
NOMINAL WEIGHT	25 LBS[11.4 KG]
AMPERE HOUR CAPACITY @ 24 HOUR 1.75 VOLTS/CELL @ 77°F (25° C)	34 AH

ENVELOPE DRAWING

QTY REQD	CAGE CODE	PART OR IDENTIFYING NO.	NOMENCLATURE OR DESCRIPTION	MATERIAL SPECIFICATION	ITEM NO.
PARTS LIST					
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE:			CONCORDE BATTERY CORPORATION 2009 SAN BERNARDINO RD, W. COVINA, CA 91790		
FRACTIONS	DECIMALS	ANGLES	CONTRACT NO.	TITLE	
± 1/32	.XX ± .06	± 1°	NA	BATTERY, SLA, 12 VOLT, PVX-340T	
	.XXX ± .030		APPROVALS	DATE	SIZE
TREATMENT	NONE		DRAWN	8/13/01	CAGE CODE
FINISH	NONE		CHECKED	8/20/01	DWG NO.
SIMILAR TO			APPROVED	8/23/01	PVX-340T
NA	ACT WT NA	CALC WT NA	ISSUED	8/24/01	REV
					SCALE NONE
					SHEET 1 OF 1

ENGINEERING COPY 24AUG01